



INTRODUCING... shark Ultra-plus and Ultra PRO

Description	Weight Rating (kg)	Shock Travel (mm)	Overall Dimensions L x W x H (mm)
Shark Ultra Plus	40 - 120	200	556 x 327 x 1096

- Ultra-plus includes everything you need ..
- Ideal for making your ride softer.
- The Flex suspension unit is simple and has only 3 unique parts.
- Self adjusts for passengers from 40kg to 120kg.
- Exclusive stainless steel shock absorber.
- 3 axis shock mitigation for reduced whiplash from lateral and fore-aft forces.
- Small foot print.
- Non corroding 316G stainless and Flexanite.
- Polycarbonate and rubber foam seat.
- Easy to clean seat.
- Seat has side grab handles.
- Low maintenance.
- Tested 1 million full 10G impacts (200mm displacement, 100ms duration at 100kg payload).
- Light weight and easy to install.
- Complies with HSC 2000 Annex 10.
- Includes Jockey seat, Shark Flex and Standard Plinth.
- 3 years warranty.

Specification	
Model	Shark Ultra Plus
Material	316G Stainless & Flexanite™
Fastenings	316G Stainless Steel
Weight	15.5kg
Base Dimensions W x H x D (mm)	325 x 650 x 350
Seat Dimensions W x H x D (mm)	355 x 470 x 556
Rated Weight Setting	40kg - 120kg, Self Adjusting
Shock Mitigation System	Progressive 10G Rated Oil & Nitrogen Filled Shock
Shock Travel	200mm
Mounting Holes	8 x Ø8mm

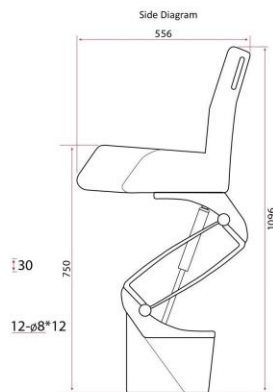

Ultra-plus model includes plinth with storage inside
Storage compartment in plinth



ULTRA SMOOTH - "when you're serious about saving your back"
Suspension Seat - Shark Ultra Plus and Shark Xtra

Description	Weight Rating (kg)	Shock Travel (mm)	Overall Dimensions L x W x H (mm)
Shark Ultra PRO	40 - 120	200	556 x 327 x 1070min 556 x 327 x 1170 max

- Shark Ultra PRO has an extended range of accessories
- Options are: footrests, fore-handle, floor-slide, quick release...
- The PRO plinth also has 5 height positions (see drawing below)
- The Flex suspension unit is simple and has only 3 unique parts.
- Self adjusts for passengers from 40kg to 120kg.
- Exclusive stainless steel shock absorber.
- 3 axis shock mitigation for reduced whiplash from lateral and fore-aft forces.
- Small foot print.
- Non corroding 316G stainless and Flexanite.
- Polycarbonate and rubber foam seat
- Easy to clean seat.
- Seat has side grab handles.
- Low maintenance.
- Tested 1 million full 10G impacts (200mm displacement, 100ms duration at 100kg payload).
- Light weight and easy to install.
- Complies with HSC 2000 Annex 10.
- Includes Jockey seat, Shark Flex and Standard Plinth.
- 3 years warranty.

Specification	
Model	Shark Ultra PRO
Material	316G Stainless & Flexanite™
Fastenings	316G Stainless Steel
Weight	15.5kg
Base Dimensions W x H x D (mm)	325 x 650 x 350
Seat Dimensions W x H x D (mm)	355 x 470 x 556
Rated Weight Setting	40kg - 120kg, Self Adjusting
Shock Mitigation System	Progressive 10G Rated Oil & Nitrogen Filled Shock
Shock Travel	200mm
Mounting Holes	8 x Ø8mm

Side Diagram



shown with optional stainless steel lapbelt and footrests (foldaway type)



Description	Overall Dimensions L x W x H (mm)
Shark Adjustable Alloy Plinth (PRO plinth)	312 x 354 x 255

5 adjustable heights, as shown below or up 25mm, 50mm, 75mm and 100mm
Foot rest pegs can be folded upwards when not in use.
Front plate can be removed and be made into a storage compartment for various items.

