
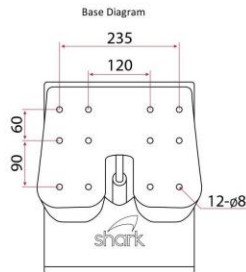


INTRODUCING... shark Ultra-plus and Xtra

Description	Weight Rating (kg)	Shock Travel (mm)	Overall Dimensions L x W x H (mm)
Shark Ultra Plus	40 - 120	200	556 x 327 x 1096

- Ultra-plus includes everything you need ..
- Ideal for making your ride softer.
- The Flex suspension unit is simple and has only 3 unique parts.
- Self adjusts for passengers from 40kg to 120kg.
- Exclusive stainless steel shock absorber.
- 3 axis shock mitigation for reduced whiplash from lateral and fore-aft forces.
- Small foot print.
- Non corroding 316G stainless and Flexanite.
- Polycarbonate and rubber foam seat.
- Easy to clean seat.
- Seat has side grab handles.
- Low maintenance.
- Tested 1 million full 10G impacts (200mm displacement, 100ms duration at 100kg payload).
- Light weight and easy to install.
- Complies with HSC 2000 Annex 10.
- Includes Jockey seat, Shark Flex and Standard Plinth.
- 3 years warranty.

Specification	
Model	Shark Ultra Plus
Material	316G Stainless & Flexanite™
Fastenings	316G Stainless Steel
Weight	15.5kg
Base Dimensions W x H x D (mm)	325 x 650 x 350
Seat Dimensions W x H x D (mm)	355 x 470 x 556
Rated Weight Setting	40kg - 120kg, Self Adjusting
Shock Mitigation System	Progressive 10G Rated Oil & Nitrogen Filled Shock
Shock Travel	200mm
Mounting Holes	8 x Ø8mm

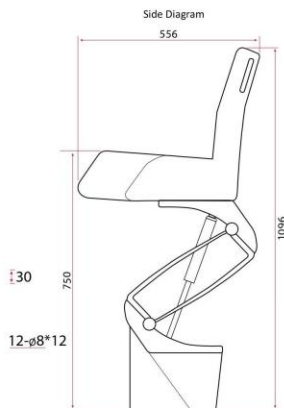

Storage compartment in plinth





ULTRA SMOOTH - "when you're serious about saving your back" Suspension Seat - Shark Ultra Plus and Shark Xtra

Description	Weight Rating (kg)	Shock Travel (mm)	Overall Dimensions L x W x H (mm)
Shark Xtra	40 - 120	200	556 x 327 x 1096

- Shark Xtra has a more "plush" feel due to the stretch-fit neoprene waterproof upholstery
- Ideal for making your ride softer.
- The Flex suspension unit is simple and has only 3 unique parts.
- Self adjusts for passengers from 40kg to 120kg.
- Exclusive stainless steel shock absorber.
- 3 axis shock mitigation for reduced whiplash from lateral and fore-aft forces.
- Small foot print.
- Non corroding 316G stainless and Flexanite.
- Polycarbonate and rubber foam seat upholstered in black neoprene
- Easy to clean seat.
- Seat has side grab handles.
- Low maintenance.
- Tested 1 million full 10G impacts (200mm displacement, 100ms duration at 100kg payload).
- Light weight and easy to install.
- Complies with HSC 2000 Annex 10.
- Includes Jockey seat, Shark Flex and Standard Plinth.
- 3 years warranty.

Specification	
Model	Shark Xtra
Material	316G Stainless & Flexanite™
Fastenings	316G Stainless Steel
Weight	15.5kg
Base Dimensions W x H x D (mm)	325 x 650 x 350
Seat Dimensions W x H x D (mm)	355 x 470 x 556
Rated Weight Setting	40kg - 120kg, Self Adjusting
Shock Mitigation System	Progressive 10G Rated Oil & Nitrogen Filled Shock
Shock Travel	200mm
Mounting Holes	8 x Ø8mm

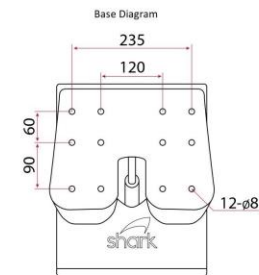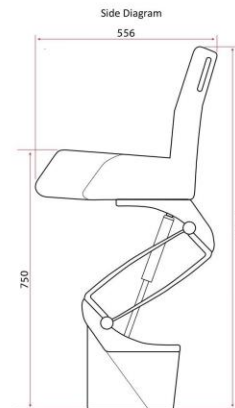

Storage compartment in plinth